





ePRO

Sealed Rechargeable Battery

6FM9(12V9AH/20HR)

(High Rate Discharge)


Constant Voltage Charge

Cycle use	14.4-15.0V
Standby use	13.5-13.8V
Initial current	less than 2.7A

- DO NOT SHORT CIRCUIT
- RECHARGE AFTER USE



SEALED LEAD BATTERY
MUST BE RECYCLED OR
DISPOSED OF PROPERLY

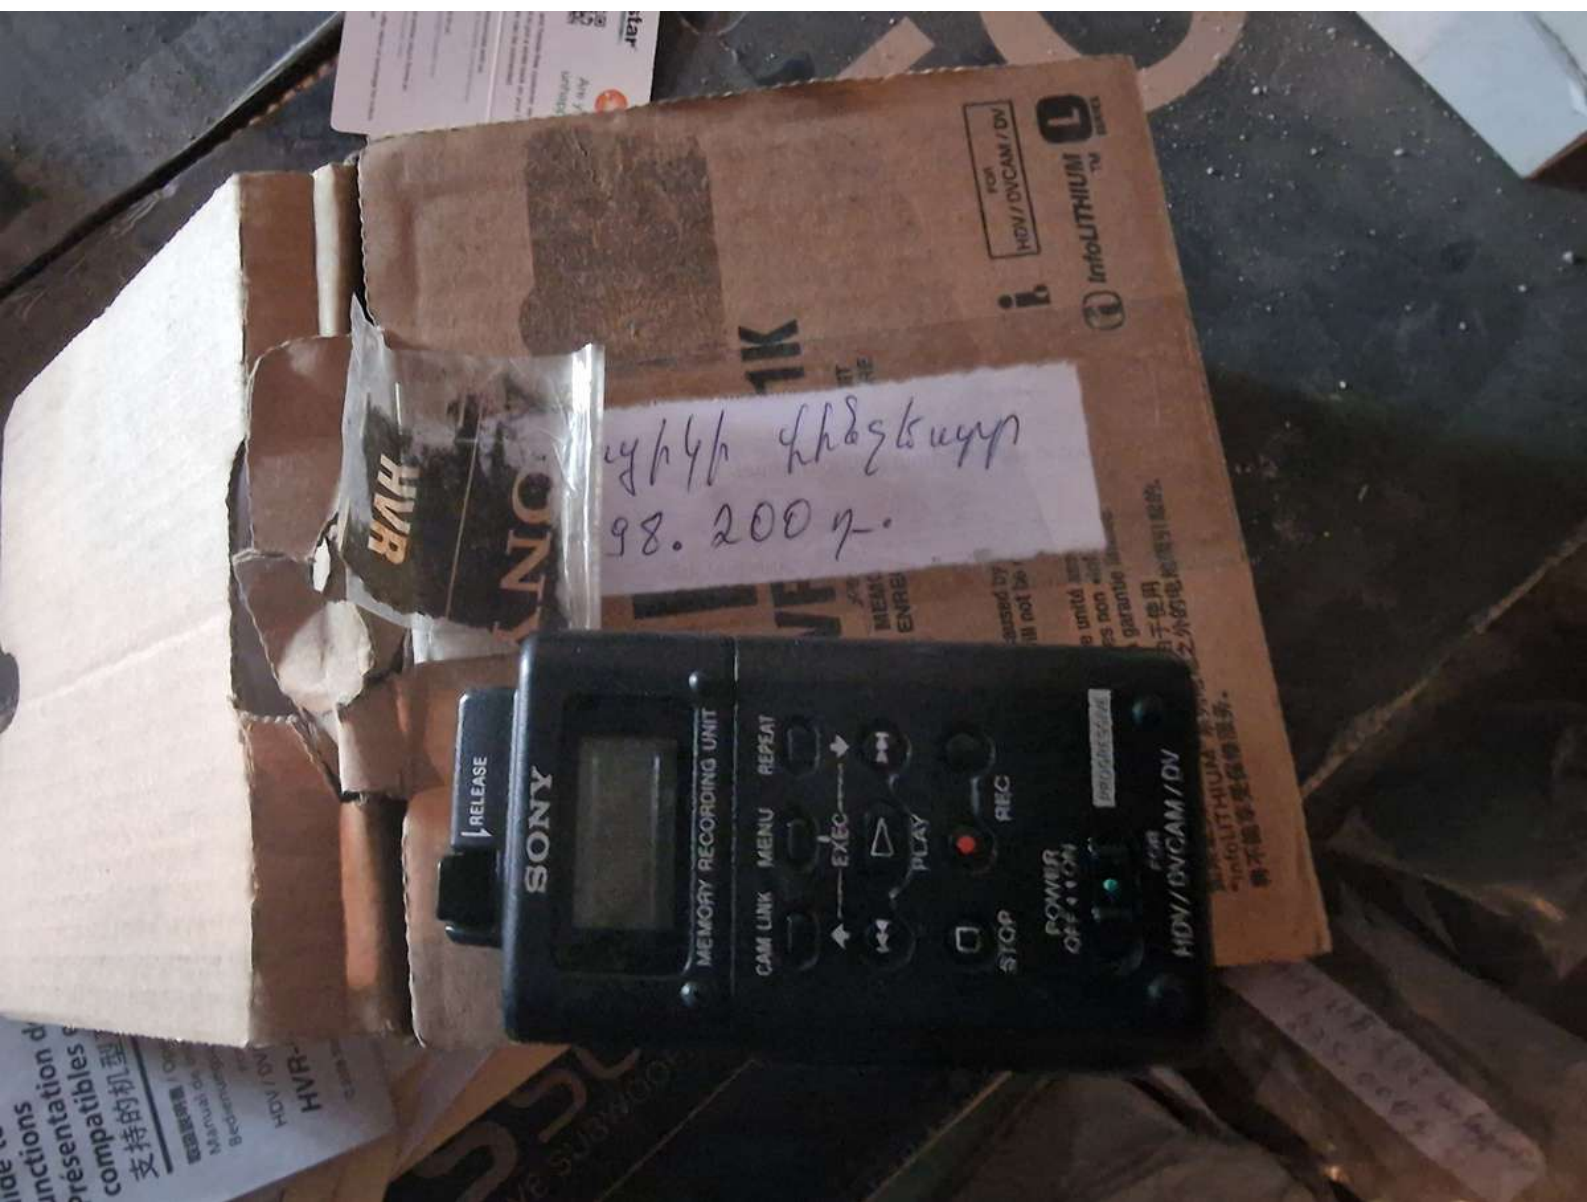







VIRTUALIZER PRO

HIGH-PERFORMANCE 24-BIT MULTI-ENGINE EFFECTS PROCESSOR MODEL DSP2024P

ELECTROMAGNETIC COMPATIBILITY
THIS DEVICE COMPLIES WITH THE PRODUCT REQUIREMENTS SET FORTH IN THE DECLARATION OF
CONFORMITY. OPERATING IN ACCORDANCE WITH THE FOLLOWING TWO CONDITIONS:
1. THIS DEVICE SHALL NOT CAUSE ANY HARMFUL INTERFERENCE, AND
2. THIS DEVICE SHALL ACCEPT ANY INTERFERENCE RECEIVED FROM THIS UNIT WITHIN SPECIFIC
LIMITS. ELECTROMAGNETIC FIELD SHOULD BE AVOIDED.
CE
N11999

ROHS
www.behringer.com
BEHRINGER

CAUTION
ATTENTION
CAUTION
BEARING IN MIND THE PRESENCE OF THE FOLLOWING DANGERS:
- THE DEVICE IS NOT TO BE USED IN A MANNER THAT COULD CAUSE DAMAGE TO THE DEVICE OR TO OTHER EQUIPMENT.
- THE DEVICE IS NOT TO BE USED IN A MANNER THAT COULD CAUSE DAMAGE TO THE USER OR TO OTHER PERSONS.
- THE DEVICE IS NOT TO BE USED IN A MANNER THAT COULD CAUSE DAMAGE TO THE ENVIRONMENT.

VIRTUALIZER PRO

DSP2024P

330.0007

330.0007

VINTAGE CHORUS, DUAL PHASER,
RESONANCE AUTO FILTER,
TUBE SIMULATION
and more!

BEHRINGER
JUST LISTEN.

www.behringer.com

"Please stick the delivery bills here within the space, thanks."

















—



DIGITAL VIDEO CASSETTE
PDV-94N

PL

S10-0000




Stamper/ghh \$hghp
323.000g.

58mm
E-UV



4961607283479

Kenko Co., Ltd.
Tokyo, Japan

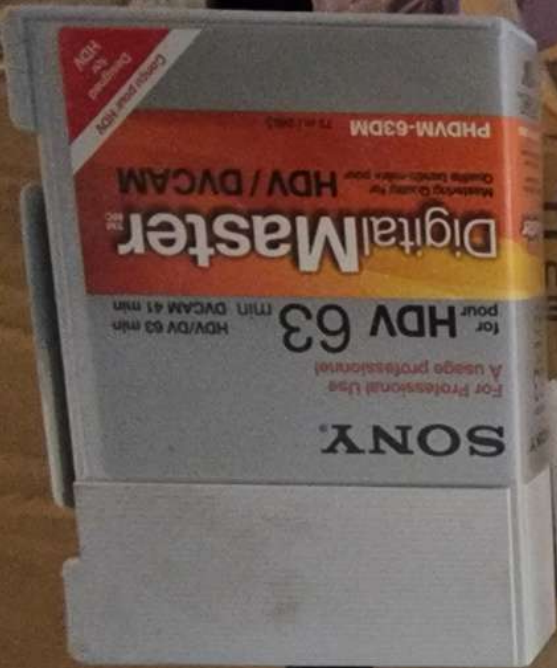

Use & apply
21.0009-

